



PHONE: (909) 993-5700
 EMAIL: sales@deluxebuildingproducts.com
 LOCATION: 1350 E. Lexington Ave., Pomona, CA 91766



www.DeluxeBuildingProducts.com

Deluxe Building Products Slotted Slip Tracks

Geometric Properties

Deluxe Building Products Slotted Steel Tracks are fabricated in several web depths and thickness. All Deluxe Building Products slotted steel tracks are produced from hot-dipped galvanized steel in G40 or G60 coating. G90 is available on request.

Steel Thickness

Mil Thickness	Design Thickness inches (mm)	Min Thickness inches (mm)
18 (25ga)	0.0188 (0.48mm)	0.0179 (0.46mm)
30 (20ga)	0.0296 (0.751mm)	0.0300 (0.762mm)
33 (20ga)	0.0346 (0.88mm)	0.0329 (0.83mm)
43 (18ga)	0.0451 (1.14mm)	0.0428 (1.09mm)
54 (16ga)	0.0566 (1.44mm)	0.0538 (1.37mm)
68 (14ga)	0.0713 (1.81mm)	0.0677 (1.72mm)

- 1) Uncoated Steel Thickness is for carbon steel
- 2) Minimum Thickness represents 95% of the design thickness and is the minimum acceptable thickness delivered to the job site based on the Section A4.3 of the AISI S100-2007

Color Code (Painted On Ends)

- | | | |
|----------------|----------------------|----------------|
| 18 Mil: Blue | 30 Mil: Pink Fuchsia | 33 Mil: White |
| 43 Mil: Yellow | 54 Mil: Green | 68 Mil: Orange |
| 97 Mil: Red | | |


ASTM & Code Standards

A653/653M; A924/A924M & A1003/A1003M, C955, C1007 INTERTEK CCRR-0224

LEED Points and Recycled Content

By using Deluxe Building Products your project can contribute to earning LEED points for:

- 1) LEED MR 2.1 and 2.2: Construction Waste Management: Up to 2 points.
- 2) LEED MR 4.1 and 4.2 Recycled Content: Up to 2 points.
- 3) LEED MR 5.1 and 5.2: Regional Materials

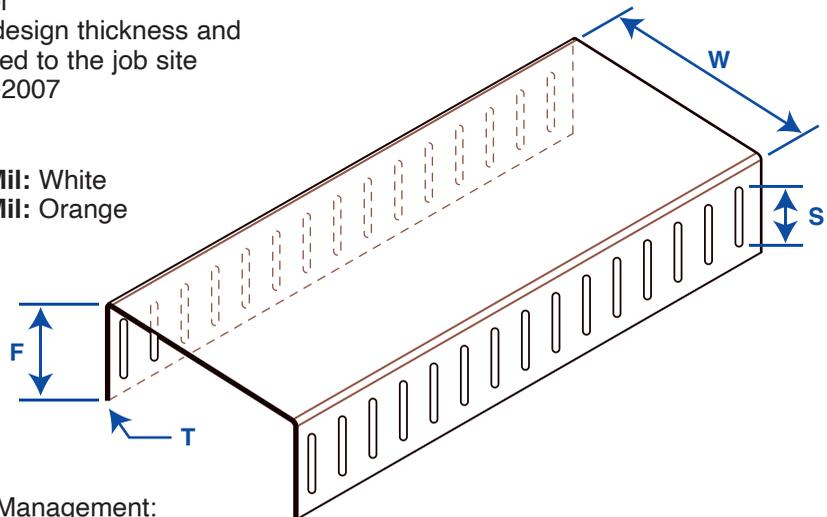

Deluxe Building Products Cold-Formed Steel Framing Products Contain 30% To 35% Recycled Steel.

These products are produced from steel consisting of the following contents:

- 1) Total Recycled Content: 32.9%
- 2) Post-Consumer Content: 25.6%
- 3) Pre-Consumer Content: 6.8%

Deluxe Slotted Track Configurations

"W"	"F"	"S"	"T"
Web Size (in)	Flange Size (in)	Slot Size (in)	Steel Thickness (mil)
2-1/2", 3-5/8", 4", 6"	2-1/2"	1-1/2"	18, 30, 33, 43, 54, 68

